

PCTV250



- Portable free-to-air USB device
- Integrated low noise amplifier
- Free software package
- Easy plug and play solution
- UHDTV and 3DTV compatible
- Compatible with Windows and Mac



www.funke.nl

Compared to funke's reference antenna equal to 35 dBi **38dB** www.funke.nl

PORTABLE

20 dBi

DVB-T


DVB-T2

ISDB-T

TNT
Orange Digital

t d

d g t v

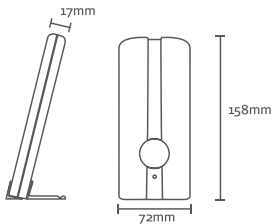

Minimum System Requirements



Windows
Windows® 7 / Vista™ or XP (32 Bit) with latest Service Pack

Intel® Pentium® 4 2,0 GHz, Pentium® M 1,3 GHz or equivalent AMD® Athlon™ XP


Sound/graphics controllers with support for DirectX® 9 or higher

Mac OS

Macintosh® computer with a PowerPC® G4, G5 or Intel Core® processor

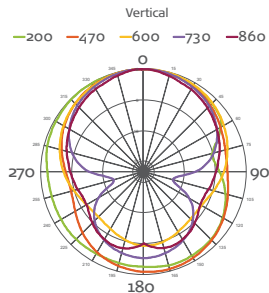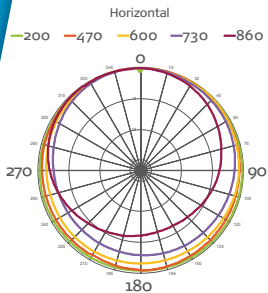

	VHF	UHF
Frequencies	174 - 230 MHz	470 - 862 MHz
Antenna Gain	10 dBi	20 dBi
Amplifier Gain	25 dB	19 dB
Amplifier Noise	2,5 dB	2,5 dB
IP3	25 dB	25 dB

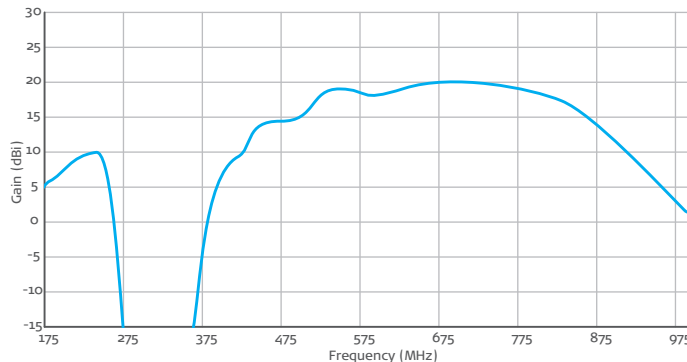

Maximum distance is an indication and depends on the specifications of the DVB-T transmitter and circumstances regarding the geographical surroundings of the DVB-T antenna.
No rights can be claimed from the information on this product card.