




IPTV Box

ML7100 H.265

- easy, friendly, economic -
2017 (v.2.6)

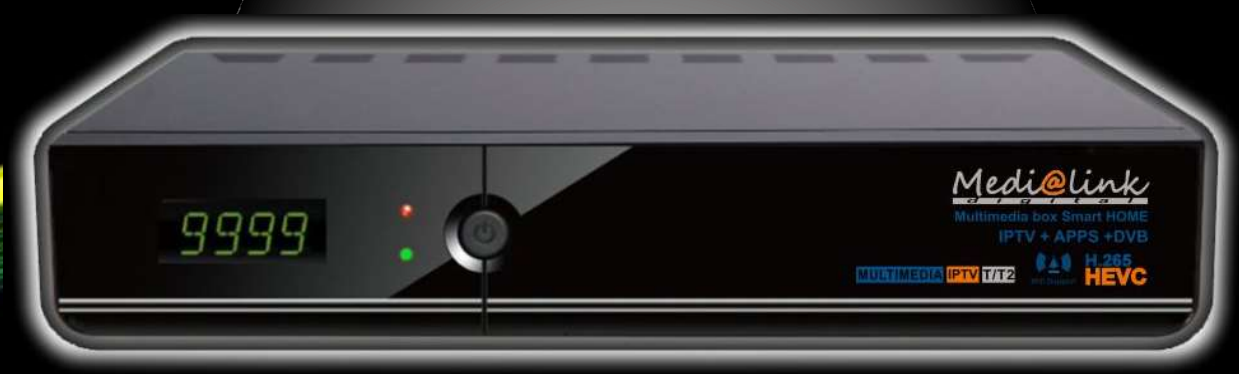

INTELLIGENCE
— FOR YOUR —
IPTV



Multimedia box+IPTV

Compatible to all IPTV systems and Portals
(Software Download via FTP or USB)

- Option SW1 : Stalker 4 portals
- Option SW2 : Xstream 6 portals
- Option SW3 : Stalker 4 portals + Xstream 6 portals



4x
6x



**TOP
10
PORTALS**

Media APPS




YouTube
SAMBA
MediaPlayer
Game
Adults
Weather
GoogleMap



SUPPORTS

**T2 HEVC
support**



**T2 tuner :
Gratis, Gift,
from
Medi@link**



Hardware Features

MAIN CHIPSET	
CPU	High-Performance 667MHz 32-bit MIPS 24KEc
MEMORY	
FLASH MEMORY	128Mb
DDR3 SDRAM	2Gb RAM
VIDEO DECODER	
TRANSPORT STREAM	MPEG-2 ISO/IEC 13818-2 MPEG-4 Part 2
PROFILE LEVEL	MPEG-2 MP@ML, MPEG-2 MP@HL MPEG-4 AVC/H.265 HP@L4.1
VIDEO FORMAT	4:3, 16:9, Letter Box
VIDEO RESOLUTION	1080p, 1080i, 720p, 576p, 576i, 480p, 480i
AUDIO / VIDEO / DATA INPUT/OUTPUT	
Scart OUTPUT	Scart
RS-232C	Phone Jack Type (Max.115200bps)
HD Out	1 x HD Out
USB	2 x (USB 2.0 Host), Front & Rear
Ethernet and USB-WiFi	RJ-45 Ethernet and USB WiFi support
AUDIO DECODER	
AUDIO DECODING	MPEG/MusiCam Layer I & II, AC3 Down Mix
AUDIO MODE	Mono / Dual / Joint Stereo / Stereo
AUDIO BIT RATE	32Kbits/s – 384Kbits/s
SAMPLING FREQUENCY	32, 44.1, 48KHz
POWER SUPPLY	
INPUT VOLTAGE	DC 12V 2A
TYPE	Adapter Type
PROTECTION	Separate internal fuse The input should be protected against lightning.
PHYSICAL CHARACTERISTICS	
DIMENSION (W x H x D)	180 x 40 x 120 (mm)
NET WEIGHT	Approx. 1.0Kg
OPERATING TEMPERATURE	0 °C to +45 °C
STORAGE TEMPERATURE	-10 °C to +70 °C